## GE Consumer & Industrial Specialty Lighting


# **CSR Lamps**



The GE CSR20000/SA lamp is a single ended metal halide lamp without an outer jacket. It's small arc gap of 7 mm provides greater optical control and luminance. This lamp is compact, highly efficient, and is a cold start lamp with a maximum seal temperature of 500°C. The CSR20000/SA is mainly used in event lighting..

#### Product Description CSR2000/SA

<ul> <li>Order Description</li> </ul>	CSR2000SA
Product Code	21801
<ul> <li>Pack Quantity</li> </ul>	6
<ul> <li>Rated Wattage</li> </ul>	1800W
<ul> <li>Rated Voltage</li> </ul>	100 <u>+</u> 10V
•Lamp Current (ECG/MCG)*	20A
•Ignition Voltage (cold/hot)	5
•Lumens	155,000 Lm
•Lumens per watt	86
•Ra	>80
<ul> <li>Chromaticity</li> </ul>	x 0.3230
coordinates	x 0.3290
•Color temperature	6,000K
•Arc Length (C)	7.5 mm
•Lamp length (A)	MAX135
<ul> <li>Light center length (B)</li> </ul>	59 <u>+</u> 1.0
•Lamp diameter	-
<ul> <li>Average rated life</li> </ul>	750hr
•Base	GY22

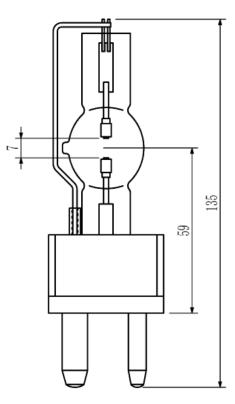

\*ECG = electronic control gear/ MCG = Magnetic control gear

### Lamp Operation

Burn PositionAnyMaximum Seal Temperature350° CCoolingForced Cooling/FanLamp can be used on electronic or AC magneticBallast/igniters



GE imagination at work

🚳 and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006

GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior and/inciden or public connouncement. All descriptions in the publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting control cocept any liability arising from the relation or such data to the extent permitted by Jaw.

#### CSR2000/SA - Data sheet - April 2008

#### **Application Information**

- •Do not exceed rated wattage or voltage
- •Replace lamp at or before rated life
- •Do not exceed rated seal temperature
- •Use only with properly rated fixtures and ballasts

#### **Distributor:**



Phone: 407-857-8770 Fax: 407-857-8771 Email: sales@techni-lux.com