

SpinMaster™

MJS-1, MJS-2, MJS-3



Spin Master I™
MJS-1



Spin Master II™
MJS-2

Features

- Spin Master I - Lines of colored images spin and twist under both audio and DMX control. This innovative effect comes with built-in single- and four-unit audio shows, plus DMX control. Perfect for a quick standalone effect, or accompanying other DMX equipment.
- Spin Master II - Colored images radiate from a bi-directional rotating axis. This full-barrel effect covers a big area with streams of colored images. Sixteen colors/gobos whirl under both audio and DMX control.
- Spin Master III - The first 360-degree full-barrel effect, Spin Master III radiates spinning, flipping colored images. Innovative head mechanism allows unprecedented movement in a full-barrel effect. Sixteen colors/gobos whirl, twist, and flip under both audio and DMX control.

Product Specifications

Dimensions: 475x220x160 (LxWxH w/o bracket)
Weight: 7.7 kg Voltage: 120V~60Hz, 230V~50Hz;
Power: 300W Fuse: 250V/3.15A
Lamp: G6.35 64655 24V/250W
Signal: USITT DMX512; Connectors: 3-pin canon
Lamp: ELC GX5.3 24V/250W Osram: HLX 64653

Description

Put some spin into your business. Twist and shout with this innovative effect series. Spin Master means money for you.

Three versions suit different customers. For the mobile DJ who wants a quick, inexpensive effect, Spin Master I makes lines of colored images twist in a vortex, under audio and DMX control.

Spin Master II puts more spin onto the stage. This full-barrel effect radiates streams of colored images over a large area. Built-in single- and four-unit audio programs provide instant shows, while DMX allows personal expression for professional performances.

The first 360-degree full-barrel effect, Spin Master III radiates spinning, flipping colored images -- in all directions. Surprise customers with the flipping movement of this full-barrel effect.

The Spin Master series offers innovation for everyone. Make anyplace radiate -- with the Spin Master effect light series.

GENI ELECTRONICS CO., LTD.

Factory: No. 12, Alley 12, Lane 732, Chung Cheng Rd., Yung Kang, Taiwan Tel: (06) 253-8513 Fax: (886-6) 253-8685
Showroom: Taipei World Trade Cntr., Rm 3A-04, No 5, Sec.5, Hsin Yi Rd., Taipei Tel: (02) 2722-2910 Fax: (866-2) 2722-2910



SpinMaster II

Operation
at a
Glance

MJS-2

(A) Link the units for Audio or DMX control. See Fig. A1.

(B) Set function dip switch #1 of first unit for desired control mode: Audio = function dip #1 ON; DMX mode = function dip #1 OFF. Set function dip #1 of following units OFF.

(C) Set function dip switch #2 of last unit in a series of units ON. Set function dip switch #2 of other units OFF.

(D) Set DMX dip switches as follows: unit 1 dip #1 ON; unit 2 DMX dip #2, 1 ON; Unit 3 DMX dip #3, 1 ON; Unit 4 DMX dip #3, 2, 1 ON.

(E Audio) When more than four units are linked, repeat dip switch settings as follows: Unit 5, 9, 13, 17... = unit 1; 6, 10, 14... = unit 2; unit 7, 11, 15... = unit 3; unit 8, 12, 16... = unit 4. Option: For low BPM music, flip ON dip switch #6 on the first unit; For high BPM music, flip ON dip switch #7 on the first unit.


(E DMX) When more than four units are linked, either repeat DMX settings for simplicity as in F Audio above, or give each unit a specific DMX address, according to DMX procedures.

(F) Supply electric power to all the equipment. Do not supply power before making connections.

(G Audio) Turn on the music. Mojo Spin Master will perform to the beat of the music.

(G DMX) Refer to your DMX controller operating instructions and the Mojo Spin Master II DMX channel chart (Fig. C1).

Figure A1 - Audio Set Up - MJS-2

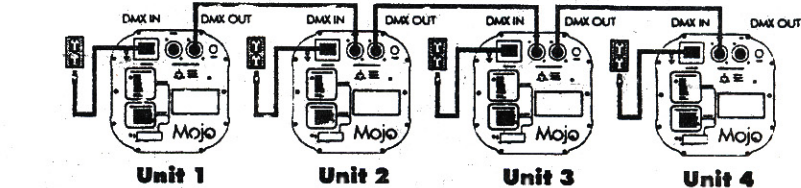

DMX Set Up - MJS-1


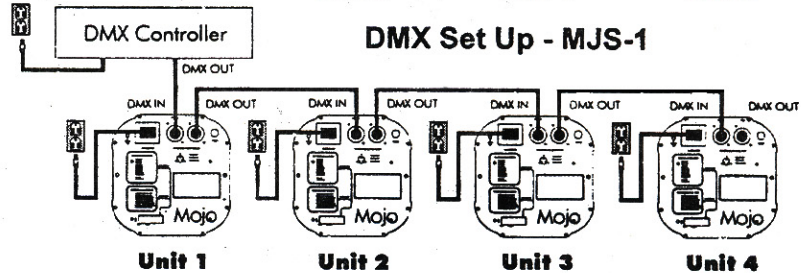


Figure B1 - Function Dip Switch Chart - MJS-2

Dip	OFF Mode	ON Mode
#1	Single unit show mode	Single unit audio show mode
#2	Single unit audio mode	4-unit audio show mode, master
#3	Single unit audio mode	Self-test mode
#4	Single unit audio mode	Single, slow show mode
#5	Single unit audio mode	Focus assistance
#6	1- unit audio, mixed show	Audio low BPM show mode
#7	1-unit audio, mixed show	Audio high BPM show mode
#8	Single unit audio mode	No program
#9	Single unit audio mode	No program

Figure C1 - DMX Channel Chart - MJS-2

CH 1 - Effect
208-255 Strobe 1 fps to 5 fps
171-207 Rotation slow - fast
160-170 Red Lips (16)
150-159 Green Tropics (15)
139-149 Orange Candle (14)
128-138 Dark Blue Circle (13)
118-127 Yellow Clouds (12)
107-117 Blue Stars (11)
96-106 Purple Hearts (10)
86-95 Blue & Purple Arc (9)
75-85 Green Flowers (8)
64-74 Yellow Circle Ring (7)
54-63 Four-color Square (6)
43-53 Blue Bubbles (5)
32-42 Green, White, Yellow Bar (4)
22-31 Red Triangle (3)
11-21 White Circle (2)
0-10 Shutter (1)

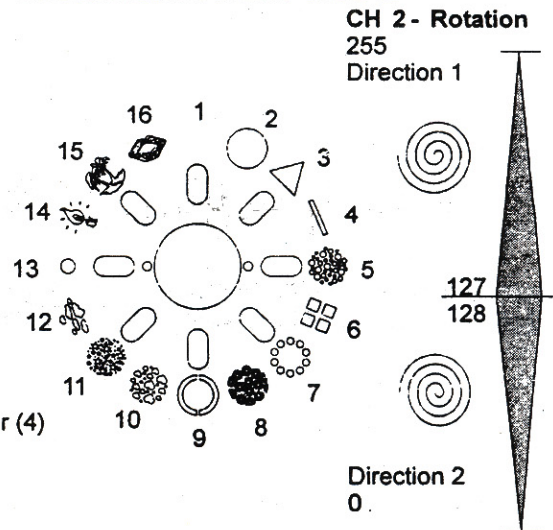

GENI ELECTRONICS CO., LTD.

Factory: No. 12, Alley 12, Lane 732, Chung Cheng Rd., Yung Kang, Taiwan
Showroom: Taipei World Trade Cntr., Rm 3A-04, No 5, Sec.5, Hsin Yi Rd., Taipei

Tel: (06) 253-8513 Fax: (886-6) 253-8685
Tel: (02) 2722-2910 Fax: (866-2) 2722-2910