

Single Pole Devices and Temporary Power
 Series 16 - 300 and 400A, 600V AC/250V DC
Paralleling Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Blue	783585113111	HBLPTBL



Standards

UL 498 and UL1691
 UL Enclosure Types 3R, 4X, 12

Specifications


Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum

Mechanical

Product Identification	Ratings are a permanent part of the device
------------------------	--

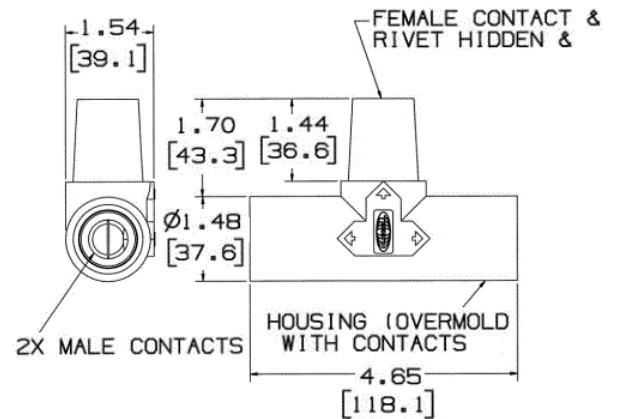

Online Resources

Customer Use Drawing
 eCatalog
 Installation Instructions

Distributor:



Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com
www.techni-lux.com

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

