


P.5 TW

LUX DIAGRAM

Narrow spread lens of 15°
 Medium spread lens of 21°
 Wide spread lens of 43°

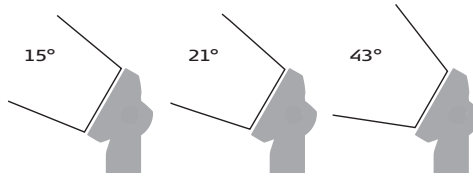

All LEDs on

Distance (m)	Illumination (Lux)	Beam width, (m)
1	124300	0,3
2	31100	0,5
3	13800	0,8
5	4970	1,3
10	1240	2,6
15	550	3,9
20	310	5,3
25	200	6,6
30	140	7,9
35	100	9,2
40	80	10,5
45	60	11,8
50	50	13,2

15°

Distance (m)	Illumination (Lux)	Beam width, (m)
1	63150	0,4
2	15800	0,7
3	7000	1,1
5	2500	1,9
10	650	3,7
15	280	5,6
20	160	7,4
25	100	9,3
30	70	11,1
35	50	13
40	40	14,8
45	30	16,7
50	25	18,5

21°

Distance (m)	Illumination (Lux)	Beam width (m)
1	28900	0,8
2	7200	1,6
3	3200	2,4
5	1155	3,9
10	290	7,9
15	130	11,8
20	70	15,8
25	50	19,7
30	30	23,6
35	25	27,6
40	18	31,5
45	15	35,5
50	12	39,4

43°

Distributor:



Phone: 407-857-8770
 Fax: 407-857-8771
 Email: sales@techni-lux.com