


CSR Lamps

The GE CSR1200/DE is a double ended metal halide lamp that provides high efficiency, excellent color rendering, hot restrike capability, and a daylight color temperature. The CSR1200/DE is used in the film and event lighting field of entertainment lighting.

Product Description CSR1200/DE

•Order Description	CSR1200/DE
•Product Code	48453
•Pack Quantity	6
•Rated Wattage	1,200W
•Rated Voltage	100± V
•Lamp Current (ECG/MCG)*	12.0A
•Ignition Voltage (cold/hot)	5/55(MAX)
•Lumens	110,000 Lm
•Lumens per watt	92
•Ra	>90
•Chromaticity coordinates	x 0.323 y 0.325
•Color temperature	6,000K
•Arc Length	10(MAX)mm
•Lamp length	220
•Light center length	
•Lamp diameter	MAX ϕ 27
•Average rated life	750 hr
•Base	SFc 15.5-6 SI/M6

*ECG = electronic control gear/ MCG = Magnetic control gear

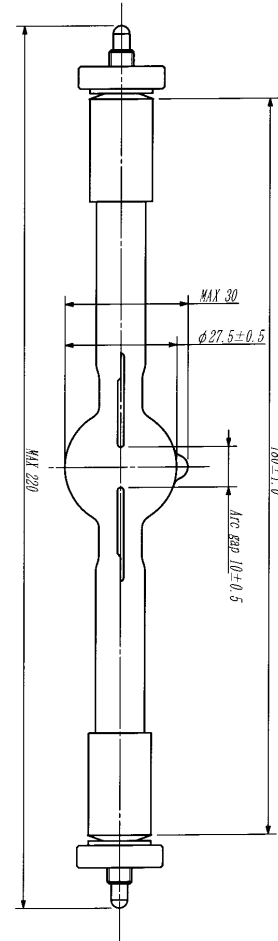

Lamp Operation

Burn Position	H15
Maximum Seal Temperature	350° C
Cooling	Forced Cooling/Fan
Lamp can be used on electronic or AC magnetic Ballast/igniters	

Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts



GE imagination at work

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com