


CSR Lamps

The GE CSR4000/DE is a double ended metal halide lamp that provides high efficiency, excellent color rendering, hot restrike capability, and a daylight color temperature. The CSR4000/DE is used in the film and event lighting field of entertainment lighting.

Product Description CSR4000/DE

•Order Description	CSR4000/DE
•Product Code	48455
•Pack Quantity	6
•Rated Wattage	4,000W
•Rated Voltage	200± V
•Lamp Current (ECG/MCG)*	20.0A
•Ignition Voltage (cold/hot)	5/75(MAX)
•Lumens	410,000 Lm
•Lumens per watt	103
•Ra	>90
•Chromaticity coordinates	x 0.323 y 0.325
•Color temperature	6,000K
•Arc Length	34(MAX)mm
•Lamp length	MAX405
•Light center length	
•Lamp diameter	MAX42
•Average rated life	500hr
•Base	Sfa21-12

*ECG = electronic control gear/ MCG = Magnetic control gear

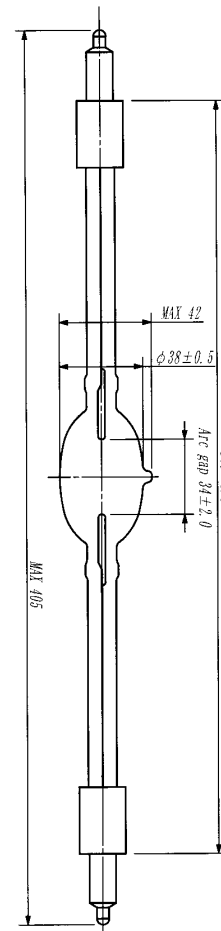

Lamp Operation

Burn Position	H15
Maximum Seal Temperature	350° C
Cooling	Forced Cooling/Fan
Lamp can be used on electronic or AC magnetic Ballast/igniters	

Application Information:

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts

Distributor:



GE imagination at work



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com