

Hubbellock® Devices  
 60A, 600V AC, 4 Pole, 5 Wire Grounding  
 Hubbellock® Flanged Receptacle

# HUBBELL

## Features

- Spring loaded safety shutter contains arcing when mating or un-mating devices under load
- Spring loaded safety shutter automatically ejects the plug eliminating contact teasing
- Box terminals in conjunction with stainless steel terminal screws provide maximum termination strength and dependability
- Metallic housing provides protection from damage in harsh environments

## Ordering Information

Description	Device Color	UPC	Catalog Number
Black phenolic interior with steel housing and flange with blue finish	Blue	783585017525	HBL26521

## Listings



Listed to UL Standard  
 Certified to CSA Standard

## Specifications

Flanged Housing	Zinc plated steel
Receptacle Interior	Phenolic
Contacts / Springs	Copper alloy
Terminal	Copper
Terminal Screws	Stainless steel

## Performance

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	2,000V minimum
<b>Mechanical</b>	
Terminal Accomodation	#8 AWG - #4 AWG solid or stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
<b>Environmental</b>	
Flammability	UL 94 V0 for Receptacles and Inlets.HB or better for Plugs and Connectors
Moisture Resistance	IP30 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

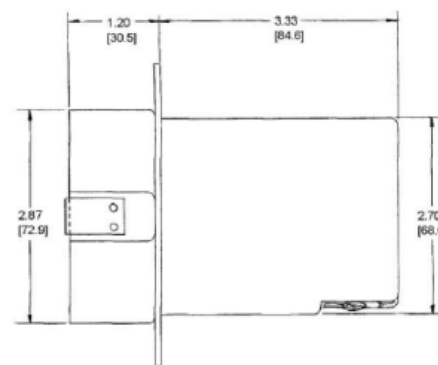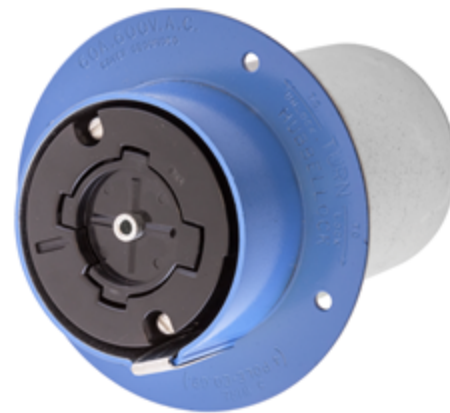

## Accessories

Plug	HBL26519
------	----------

## Resources

Customer Use Drawing  
 eCatalog



Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

www.techni-lux.com

**Distributor:**



Phone: 407-857-8770

Fax: 407-857-8771

Email: [sales@techni-lux.com](mailto:sales@techni-lux.com)

[www.techni-lux.com](http://www.techni-lux.com)