



# Product Data Sheet

**Product Type** IP65 XLR Plug

**Product Model** SCWF3-B

**Customer Name** \_\_\_\_\_

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed





## Product Data Sheet

**Product Type** IP65XLR Plug

**Product Model** CNAC-K

**Customer Name** \_\_\_\_\_

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed

**Distributor:**



Phone: 407-857-8770

Fax: 407-857-8771

Email: [sales@techni-lux.com](mailto:sales@techni-lux.com)

[www.techni-lux.com](http://www.techni-lux.com)



## Product Data Sheet

Product Type	IP65 XLR Plug	
Product Model	SCWF3-B	
Product Features		
<ul style="list-style-type: none"><li>➤ 3-core waterproof XLR female cable connector with black plated housing and gold plated contacts</li><li>➤ Waterproof rating IP65</li><li>➤ The metal housing uses internal thread design to ensure that it can withstand gravity under any site conditions</li><li>➤ Cable O.D.: 5-8mm</li><li>➤ No ring design, more compact</li><li>➤ The boot is equipped with a polyurethane sealing sleeve to prevent the cable from being affected by bending pressure to the greatest extent</li></ul>		



## Product Data Sheet

### Product Parameters

Item	Specification
Connection Type	XLR
Gender	Female

### Electrical Parameters

Item	Specification
Capacitance between contacts	$\leq 4 \text{ pF}$
Contact resistance	$\leq 3 \text{ m}\Omega$
Dielectric strength	1.5 kV DC
Insulation resistance	$> 10 \text{ G}\Omega$ (initial)
Rated current per contact	16 A
Rated voltage	$< 50 \text{ V}$



## Product Data Sheet

### Mechanical Parameters

Item	Specification
Cable O.D.	5~8 mm
Insertion force	≤ 20 N
Withdrawal force	≤ 20 N
Service life	> 1000 mating cycles
Cable size	Max.1.0 mm <sup>2</sup> Max.18 AWG
Locking device	Latch lock

## Product Data Sheet

### Material and Environmental Parameters


Item	Specification
Boot	PA
Contacts	Cu alloy
Contact plating	Au
Insert	PA
Housing	Zinc alloy
Housing plating	Black plating
Strain relief	POM
Flame-retardant grade	UL 94 HB
Protection class	IP65
Temperature range	-30°C ~ +80°C

### Standards and Certifications

Standards	IEC 61076-2-103
Solderability	Complies with IEC 68-2-20

## Product Data Sheet

### Product Drawing

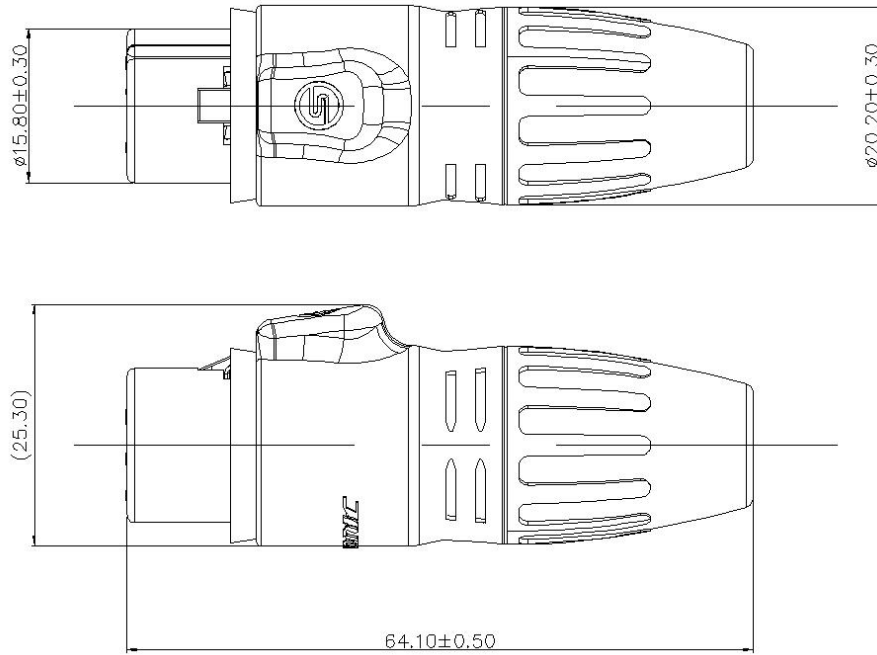

Unit: mm

### Packaging Method

1 pc per bag (include 1 pc each of inner core, housing, waterproof cable clamp, boot)  
80 pcs per inner carton, 5 inner cartons per master carton (400 pcs per master carton)


### Accessory

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> No accessories | <input type="checkbox"/> Back fastener plate |
| <input type="checkbox"/> Screws and Nuts           | <input type="checkbox"/> Other               |


## Product Data Sheet

### Assembly Instructions


- (1) Put the cable through the boot and waterproof cable clamp

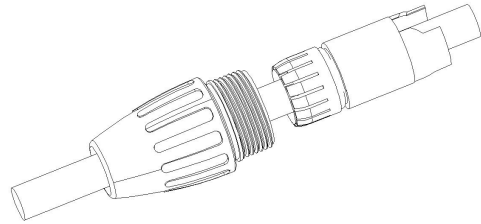


- (2) Strip the cable in the size as shown

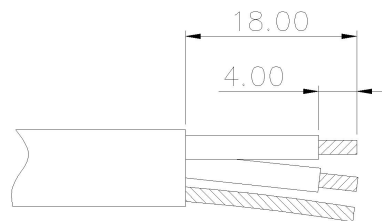

- (3) Insert the conductor of the cable into the terminal of the inner core and solder

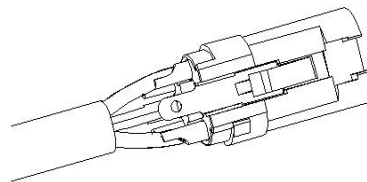


- (4) Snap the clamp into the inner core assembly bayonet

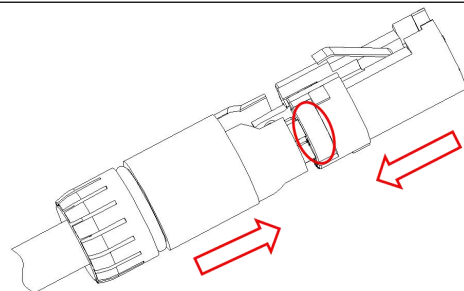



## Product Data Sheet

- (5) Push the inner core component and clamp into the housing. The two protruding ribs of the inner core component should correspond to the two grooves inside the housing.

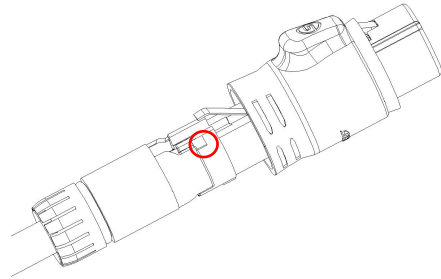

- (6) After the assembly of the cable clamp, inner core and housing, tighten the boot in a clockwise direction.

