


S-PLAY LITE– Datasheet

Create, Record, Edit and Play up to 16 Universe light shows, seamlessly integrate with 3rd party system with versatile mounting solutions.

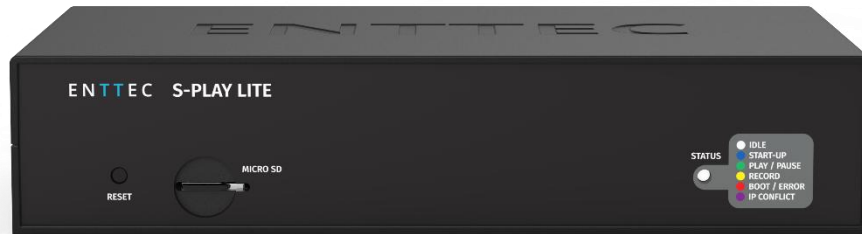

ENTTEC's S-PLAY LITE serves as a robust show recorder and playback controller, expertly integrating 3rd party system and external hardware for smart light show management.

Featuring an extensive array of 100 light Cues, users can record 16 Universes of Art-Net and sACN or 2 DMX Universes via 2 XLR DMX ports. Whether crafting simple Static scenes, recording Dynamic Cues, or easily creating gradient Effect Cues with the built-in pixel effect generator, the creative possibilities are vast.

The S-PLAY LITE facilitates flexible integration of external devices into installations, supporting Triggers or automating Events through various protocols such as Art-Net, sACN, DMX, GPIO, RS232, UDP, or OSC.

Its intuitive drag-and-drop interface within the timeline editor empowers users to design up to 100 Playlists, utilising created Cues, Events, and Triggers as building blocks.

Schedules can be set for playlists to run at specific times with unique groupings and priorities. Additionally, users can effortlessly design up to 5 user-friendly custom interfaces, simplifying navigation for end-users without complex configurations.

Features

- Supports recording and playback of up to 16 universes of Art-Net and sACN.
- Equipped with two XLR DMX ports for flexible recording and playback.
- Records cues from DMX sources with a built-in DMX value monitor.
- Enables creation of gradient Effect Cues using the in-built effect generator.
- Features an intuitive web interface for easy configuration.
- Allows up to 100 playlists with Static, Dynamic, and Effect Cues.
- Sends up to 150 automated events via RS232, Art-Net, sACN, DMX, Relays, UDP, and OSC.
- Supports up to 150 remote triggers through RS232, Art-Net, sACN, DMX, Digital Inputs, UDP, and OSC.
- Internal memory stores over 20 hours of 16-universe recording at 40FPS, expandable via Micro SD card.
- Enables creation of custom user-facing web interfaces.
- Allows scheduling of playlists for automated playback.

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

www.techni-lux.com

Specification

| | | |
|--|---|---------|
| Connectors | 1X Power Input (DC Jack) | |
| | 2X DMX512 (Female XLR5) | |
| | 1X Ethernet (RJ45) | |
| | 1X RS232 (Male DB9) | |
| | 4X Digital Input (5-Pin Screw terminal) | |
| | 2X Relay Output (6-Pin Screw terminal) | |
| | 1X Micro SD | |
| Input Voltage | 12V DC to 24V DC | |
| Power Draw (W) | 3W | |
| Current Draw (mA) | 110-250mA | |
| IP rating | IP20 | |
| PoE | IEEE 802.3af | |
| Network Speed | 10/100Base-T | |
| IGMP Version | IGMPv3 (backward compatible with v1 and v2) | |
| Number of Universes & Input / Output Protocol | 2U: USITT DMX512-A | |
| | 16U: Art-Net/sACN | |
| DMX Refresh Rate (FPS) | Art-Net & sACN | 1 to 60 |
| | USITT DMX512-A | 1 to 40 |
| Relay Max Switching Power/Current | 60W, 125VA/2A | |
| Internal Show Storage Capacity | 8GB (~20 hours of 16 universes at 40fps) | |
| Expandable storage | Yes (Micro SD) | |
| Cooling Method | Convection | |
| Environmental operating temperature | 0°C to 50°C | |
| | 32°F to 122°F | |
| Environmental operating humidity | 0 to 95% (non-condensing) | |
| Body material | ABS Plastic & Anodised Aluminium | |
| Unit dimensions | 200*120*42 mm | |
| Unit weight | 0.47kg / 1.04lbs | |
| Shipping dimensions | 335*265*78 mm | |
| Shipping weight | 1.10kg / 2.42lbs | |
| Warranty | 3-year return to base manufacturer warranty | |


Certification



Box Contents

- S-PLAY LITE
- 1x Cat5 Cable
- Rack, Surface/Din mount ears + Din Clips + screws
- 12V PSU & international plugs

Application Diagram

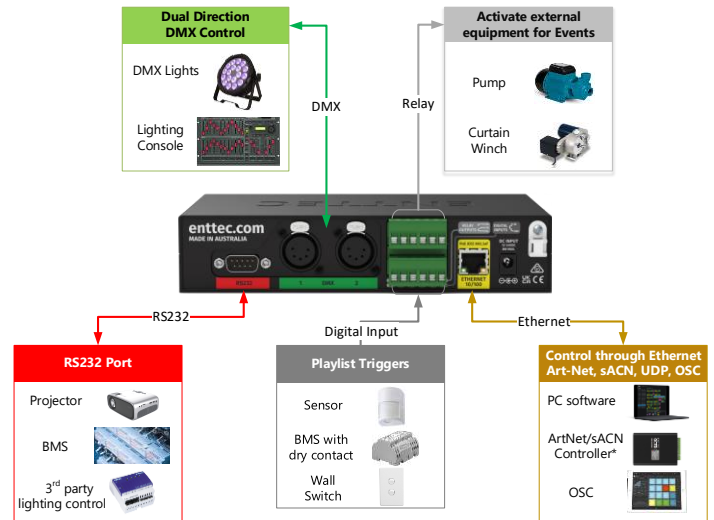

Safety

- Do not expose this device to rain or moisture, doing so will void the warranty.
- Make all the connections before you connect power.
- Do not remove the cover, there are no user serviceable components inside.
- Never plug this unit in to a dimmer pack.
- Ensure proper shield connections.
- Mount this unit in an area that will allow air flow - allow 150mm (6") space.
- Never connect 0V to electrical Earth.

Ordering Information

For further support and to browse ENTTEC's range of products visit the ENTTEC website.

| Item | SKU |
|-------------|-------|
| S-PLAY LITE | 70094 |

enttec.com

MELBOURNE AUS / LONDON UK / RALEIGH-DURHAM USA / DUBAI UAE

Due to constant innovation, information within this document is subject to change.