

# STAGEMAKER® COMPACT HOIST PACKAGES

## Stagemaker® Configuration A Direct Motor Control for Mobile Installations

Stagemaker® Configuration A utilizes direct motor control for easier setup and simplified cabling – saving time and money. Hoist can be mounted in either the normal or inverted position. A direct motor control hoist in the inverted position is best suited for temporary or short-term setups. Full line voltage controller furnished separately.



### Hoist Features:

- Compact – for better space utilization on stage, in trusses and on the truck.
- Quiet operation – can even be used during performances.
- 5-pocket load wheel provides exceptionally smooth operation and reduced chain wear.
- Anti-jam chain guide for precise chain alignment.
- Increased Safety with combined load limiter / brake.
- 80 micron thick black epoxy paint finish.
- Canvas chain container.
- Black load chain.
- Ergonomic handles.
- 208V / 230V-3Ph-60Hz motor rating.



# STAGEMAKER® COMPACT HOIST PACKAGES

4501 Gateway Blvd.  
Springfield, OH 45502  
Phone: (937) 328-5100  
Fax: (937) 325-5319  
Nationwide Toll Free  
1-800-955-9967  
www.rmhoist.com  
Bulletin No. STGM-A2005

Stagemaker is a registered  
trademark of R&M Materials  
Handling, Inc.

## Controller:

- 4 or 8 channel compact controller in a hand case

## Accessories:

- Go button with E-stop remote
- Motor cables
- Single & twin flight cases (SM5, SM10 only)

## Available Hoist Options:

- Self locking hook (SM5 and SM10)
- Fixed top hook (SM5 and SM10)
- Second brake (SM5 and SM10)
- Steel control enclosure for SM1
- Vinyl rain cover
- Drain hole in the load sprocket compartment (SM5 and SM10 only)
- 18" power pigtail – no plug
- Blue CE male plug for pigtail
- Twist-lock male plug for pigtail
- Blue CE female receptacle
- Twist-lock female receptacle
- 208V-3Ph-60Hz power supply

## Technical Data:


Capacity (Ton)	Model	Speed (fpm)	Falls	Chain type (mm)	Power (HP)	Nominal Current 230 V	Weight of Unit <sup>(1)</sup> (lbs)	Chain weight (lb/ft)
1/16	SM1 068 M2 -A	32	1	3.1 x 9.3	0.33	2.0	29	0.148
1/16	SM1 0616 MI -A	64	1	3.1 x 9.3	0.33	2.0	29	0.148
1/8	SM1 128 MI -A	32	1	3.1 x 9.3	0.33	2.0	29	0.148
1/4	SM5 254 MI -A	16	1	4.8 x 12.5	0.65	2.0	58	0.363
1/4	SM5 258 MI -A	32	1	4.8 x 12.5	1.3	4.0	58	0.363
1/4	SM5 2516 MI -A	64	1	4.8 x 12.5	1.3	4.0	58	0.363
1/2	SM5 504 MI -A	16	1	4.8 x 12.5	0.65	2.0	58	0.363
1/2	SM5 508 MI -A	32	1	4.8 x 12.5	1.3	4.0	58	0.363
1/2	SM10 5016 MI -A	64	1	6.8 x 17.8	2.8	7.2	113	0.726
1	SM10 1004 MI -A	16	1	6.8 x 17.8	1.4	3.6	113	0.726
1	SM10 1008 MI -A	32	1	6.8 x 17.8	2.8	7.2	113	0.726
2	SM10 2002 MI -A	8	2	6.8 x 17.8	1.4	3.6	118	0.726
2	SM10 2004 MI -A	16	2	6.8 x 17.8	2.8	7.2	118	0.726

(1) approximate weight without chain

Specifications subject to change.

## SC Controller, Hoist & Cable + Splitters

Four hoists – One cable from the controller to the hoists

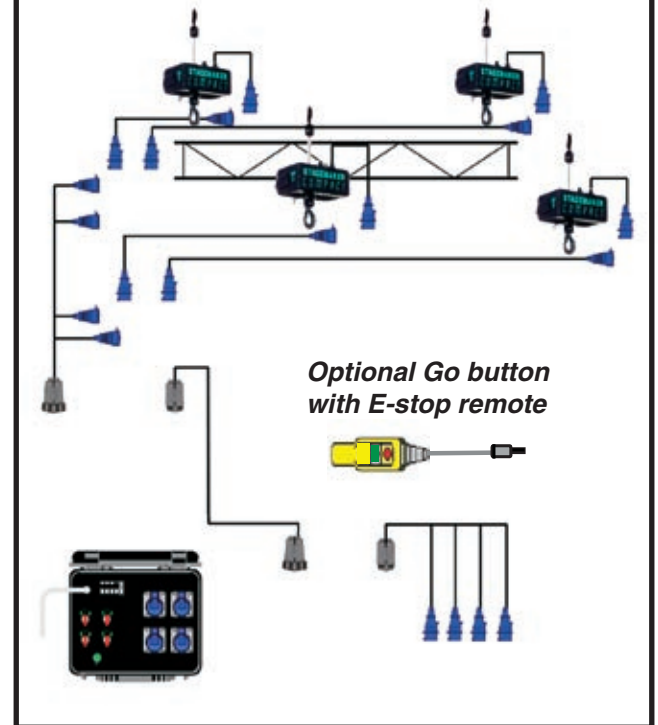

YOUR DISTRIBUTOR CONTACT IS:

