



# PAR38 LED

## 32PAR38/LED/830/F25/ND SO 120V 6/1

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Product data

General Information	
Cap-Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	32-250W

Light Technical	
Color Code	830 [ CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	2800 lm
Luminous Flux (Rated) (Nom)	2800 lm
Luminous Intensity (Nom)	8000 cd
Color Designation	White (WH)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (Rated) (Nom)	88 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	32 W
Lamp Current (Nom)	280 mA

Wattage Equivalent	250 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.85
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	95 °C

Controls and Dimming	
Dimmable	No

Approval and Application	
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	Not applicable


Product Data	
Order product name	120V PAR38 32W 25D 3000K SO
EAN/UPC - Product	046677460525
Order code	460527
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001202404
Net Weight (Piece)	0.540 kg

# PAR38 LED

## Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005




## Dimensional drawing

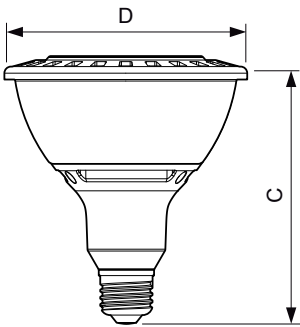

PAR38 35W-70W 2800lm 25D 3000K E26 ND

Product	D	C
120V PAR38 32W 25D 3000K SO	122 mm	133 mm

## Photometric data

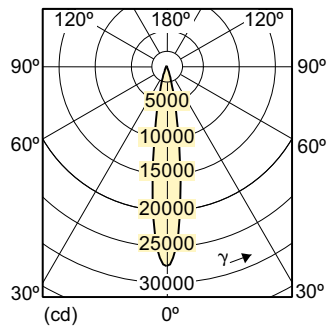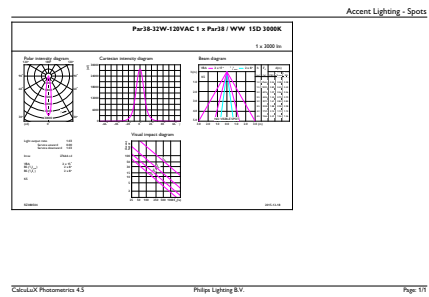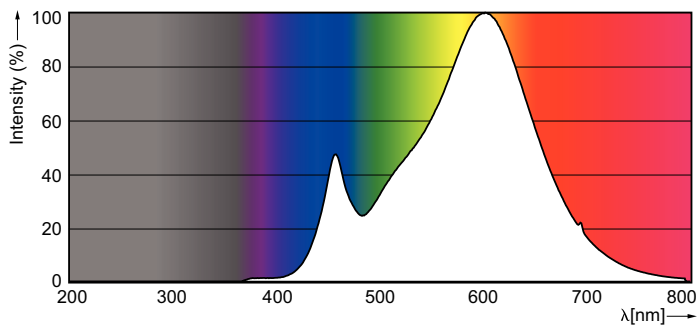

Distributor:

**Techni-Lux**  
www.techni-lux.com

Phone: 407-857-8770  
Fax: 407-857-8771  
Email: sales@techni-lux.com