

PHILIPS

Lighting



MSD Platinum (Touring/Stage)

MSD Platinum 25 R 1CT/8

Product data

General Information	
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Stage/Touring
Life to 50% Failures (Nom)	1500 h
Light Technical	
Color Code	2
Luminous Flux (Min)	22100 lm
Luminous Flux (Nom)	24500 lm
Chromaticity Coordinate X (Max)	313
Chromaticity Coordinate X (Min)	280
Chromaticity Coordinate X (Nom)	297
Chromaticity Coordinate Y (Max)	316
Chromaticity Coordinate Y (Min)	289
Chromaticity Coordinate Y (Nom)	303
Correlated Color Temperature (Nom)	8000 K
Luminous Efficacy (rated) (Nom)	44 lm/W
Operating and Electrical	
Power (Rated) (Nom)	550 W


Voltage (Max)	115 V
Voltage (Min)	85 V
Controls and Dimming	
Dimmable	Yes
Luminaire Design Requirements	
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871869961403400
Order product name	MSD Platinum 25 R 1CT/8
EAN/UPC - Product	8718699614034
Order code	928495905314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928495905314
Net Weight (Piece)	108.000 g

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

MSD Platinum (Touring/Stage)


Dimensional drawing




Product	D (max)	O	C (max)
MSD Platinum 25 R 1CT/8	54 mm	1.4 mm	60 mm

MSD Platinum 25 R

Photometric data

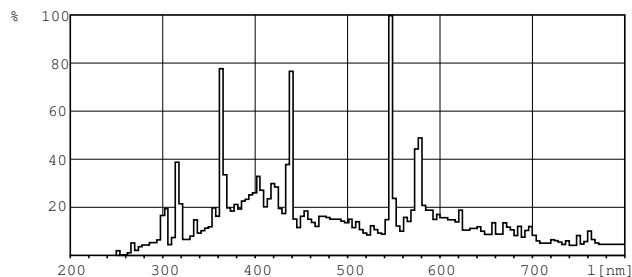

MSD

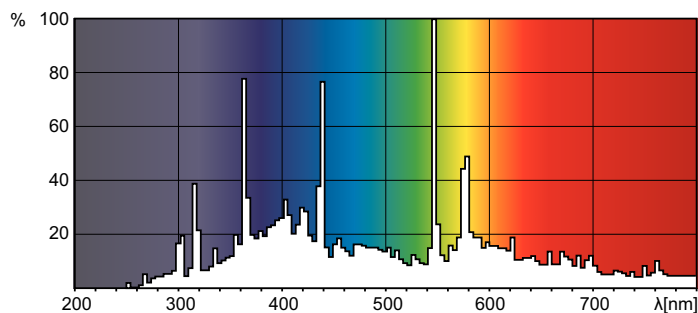

MSD



Distributor:



Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com