


CSR Lamps

The GE CSR1800/DE is a double ended metal halide lamp that provides high efficiency, excellent color rendering, hot restrike capability, and a daylight color temperature. The CSR1800/DE is used in the film and event lighting field of entertainment lighting.

Product Description CSR1800/DE

•Order Description	CSR1800/DE
•Product Code	96801
•Pack Quantity	6
•Rated Wattage	1,800W
•Rated Voltage	115V
•Lamp Current (ECG/MCG)*	15.7
•Ignition Voltage (cold/hot)	5/55 kV
•Lumens	155,000
•Lumens per watt	87
•Ra	>90
•Chromaticity coordinates	x 0.324 y 0.330
•Color temperature	5600K
•Arc Length	10(MAX)mm
•Lamp length	220
•Light center length	N/A
•Lamp diameter	MAX ϕ 27
•Average rated life	750 hr
•Base	SFc15.5-6 SI/M6

*ECG = electronic control gear/ MCG = Magnetic control gear

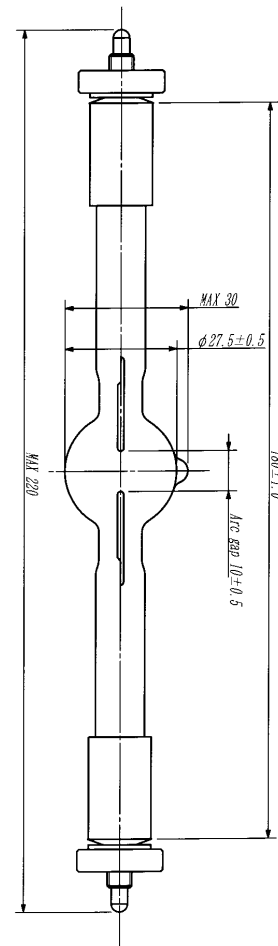

Lamp Operation

Burn Position	H15
Maximum Seal Temperature	350° C
Cooling	Forced Cooling/Fan
Lamp can be used on electronic or AC magnetic Ballast/igniters	

Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts



GE imagination at work

Distributor:

Techni-Lux
www.techni-lux.com

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com