


CSR Lamps

The GE CSR575/S/DE/70 lamp is a compact double ended metal halide lamp with a small arc gap of 7 mm providing greater optical control and luminance. This lamp is suitable for hot restrike with maximum seal temperatures up to 450° C. This lamp is generally used in the event lighting field.

Product Description CSR575/S/DE/70

•Order Description	CSR575/S/DE/70
•Product Code	70979
•Pack Quantity	10
•Rated Wattage	575W
•Rated Voltage	95V
•Lamp Current (ECG/MCG)*	6.1/6.7A
•Ignition Voltage (cold/hot)	2.5/25MAX
•Lumens	40,000 Lm
•Lumens per watt	70
•Ra	>75
•Chromaticity coordinates	x 0.307 y 0.309
•Color temperature	7,000K
•Arc Length (C)	7.0mm
•Lamp length (A)	138mm MAX
•Light center length (B)	N/A
•Lamp diameter	21mm MAX
•Average rated life	750hr
•Base	SFc 10-4 with notch

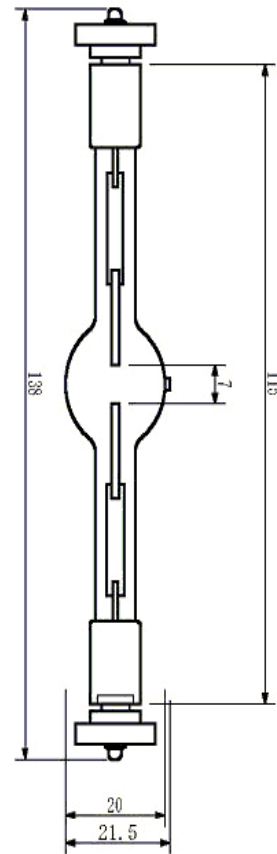

*ECG = electronic control gear/ MCG = Magnetic control gear

Lamp Operation

Burn Position	Any
Maximum Seal Temperature	450° C
Cooling	Forced Cooling/Fan

Control Gear

The CSR575/S/DE/70 can be used on electronic or AC magnetic ballast/ igniters control gear.



GE imagination at work

GE and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006


GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

CSR575/S/DE/70 - Data sheet - August 2007

CSR Lamps

Color Control

The **GE CSR575/S/DE/70** provides unrivalled color control per batch and between batches. All lamps produced operate far within the limits of perceptible color change.

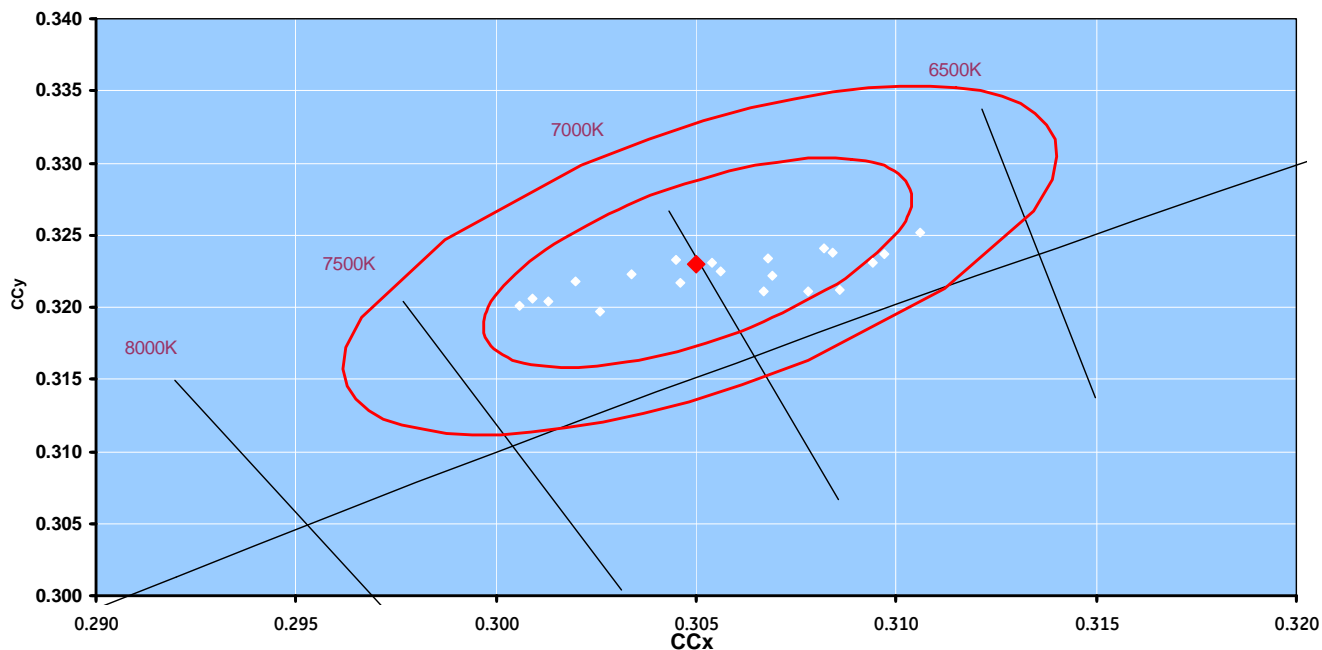

Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life of 750 hours
- Lamp should be replaced when significant optical degradation is noticed
- Do not exceed rated seal temperature of 450° C
- Use only with properly rated fixtures and ballasts
- Maximum permissible bulb temperature is 900° C



Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

GE and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006

GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

CSR575/S/DE/70 - Data sheet - April 2008