

# CSR Lamps

**22495 – CSR800/SE/HR/UVC**  
**GE Quartz Metal Halide T9.5 - Stage & Studio**

## Product Description

Lamp type High Intensity Discharge - Quartz Metal Halide  
Bulb T9.5  
Base Medium Bi-Post (G22)  
Wattage 800  
Voltage 95  
Rated Life (Vert) 750 hrs  
LEED-EB MR Credit 1208 picograms Hg per mean lumen hour  
Primary Application Stage & Studio

## PHOTOMETRIC CHARACTERISTICS


Initial Lumens 64000  
Nominal Initial Lumens per Watt 80  
Color Temperature 5800 K  
CIE Color x 0.325  
CIE Color y 0.327

## DIMENSIONS


Maximum Overall Length (MOL) 5.7000 in (144.7 mm)  
Bulb Diameter (DIA) 1.100 in (27.9 mm)

## Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life
- Do not exceed rated seal temperature
- Use only with properly rated fixtures and ballasts

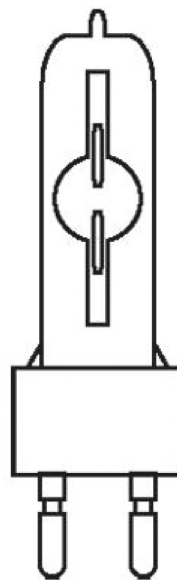

Bulb



Base



GE imagination at work

Distributor:

  
Techni-Lux  
www.techni-lux.com

Phone: 407-857-8770  
Fax: 407-857-8771  
Email: sales@techni-lux.com