

SEETRONIC

Product Data Sheet

Product Type IP67 Waterproof Power Socket

Product Model SAC3FPX-67

Customer Name _____

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed

Distributor:



Phone: 407-857-8770

Fax: 407-857-8771

Email: sales@techni-lux.com

www.techni-lux.com



Product Data Sheet

Product Type	IP67 Waterproof Power Socket	
Product Model	SAC3FPX-67	

Product Features

- Lockable three-core female power socket with contacts for line, neutral and pre-adapted safety grounding
- Durable and ruggedly sealed power connector used for electrical connection under outdoor conditions with protection grade IP67
- Match with SAC3MX-67 plug
- It can achieve the effects of waterproof and airproof at the same time
- The rubber cover with model number CNAC-FPX-67 is not included
- High current capacity rated at 16A/250V AC VDE and 20A/300V AC UL
- UL498 & UL50E Certification No. E356932
- VDE Certification No. 40044166



Product Data Sheet

Electrical Parameters

Item	Specification
Number of Contacts	2 + PE
Rated Current	16A VDE(20A UL)
Rated Voltage	250V AC VDE (300V AC UL)
Contact Resistance	$\leq 5 \text{ m}\Omega$
Dielectric Strength	4000V DC (1600V/min AC UL)
Insulation Resistance	$> 1000 \text{ M}\Omega$

Mechanical Parameters

Item	Specification
Service Life	> 1000 mating cycles
Cable Size	2.5mm ² (12AWG)
Type of Terminals	Soldering / plugging 6.3 terminals
Screw fixing torque	0.5 Nm



Product Data Sheet

Material and Environmental Parameters

Item	Specification
Housing	PA
Contacts	Cu alloy
Contact plating	Au
Flame-retardant grade	UL 94 V0
Protection class	IP67
Temperature range	-30°C ~ +80°C


Standards and Certifications

Standards	UL498 UL50E IEC61984 GB/T 34989
Certifications	UL: E356932 VDE: 40044166 CQC23003410681
Solderability	IEC 68-2-20



Product Data Sheet

Product Drawing

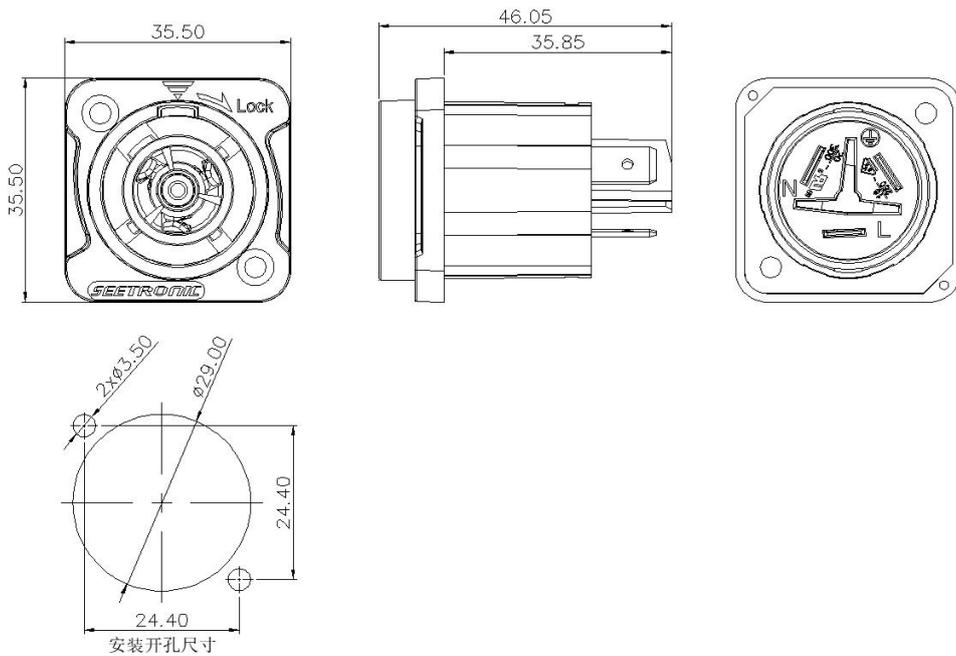

Unit: mm

Packaging Method

Blister box packaging (only include the socket body, waterproof rubber is not included and need to be purchased separately)

15 pcs per blister box, 60 pcs per inner carton, 5 inner carton per master carton (300 pcs per master carton)

Accessory

- | | |
|--|--|
| <input checked="" type="checkbox"/> No accessories | <input type="checkbox"/> Back fastener plate |
| <input type="checkbox"/> Screws and Nuts | <input type="checkbox"/> Other |

