


CSR Lamps

The GE CSR1500/S/DE/60 lamp is a compact double ended metal halide lamp with a small arc gap of 7 mm providing greater optical control and luminance. This lamp is suitable for hot restrike with maximum seal temperatures up to 450° This lamp is generally used in the event lighting field.

Product Description CSR1500/S/DE/60

| | |
|------------------------------|---------------------|
| •Order Description | CSR1500/S/DE/60 |
| •Product Code | 96800 |
| •Pack Quantity | 10 |
| •Rated Wattage | 1500W |
| •Rated Voltage | 115± 10V |
| •Lamp Current (ECG/MCG)* | 13.1A |
| •Ignition Voltage (cold/hot) | 2.5/25MAX |
| •Lumens | 132,000 Lm |
| •Lumens per watt | 89 |
| •Ra | >85 |
| •Chromaticity coordinates | x 0.326 y 0.334 |
| •Color temperature | 6,000K |
| •Arc Length (C) | 7.0mm |
| •Lamp length (A) | MAX136 |
| •Light center length (B) | - |
| •Lamp diameter | - |
| •Average rated life | 500hr |
| •Base | SFc 10-4 with notch |

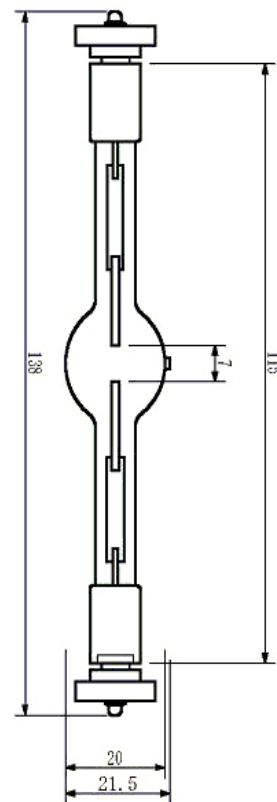

*ECG = electronic control gear/ MCG = Magnetic control gear

Lamp Operation

| | |
|--------------------------|--------------------|
| Burn Position | Any |
| Maximum Seal Temperature | 450° C |
| Cooling | Forced Cooling/Fan |

Control Gear

The CSR1500/S/DE/60 can be used on electronic or AC magnetic ballast/ igniters control gear.



GE imagination at work

GE and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006


GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

CSR1500/S/DE/60 - Data sheet - March 2008

CSR Lamps

Color Control

The **GE CSR1500/S/DE/60** provides unrivalled color control per batch and between batches. All lamps produced operate far within the limits of perceptible color change.

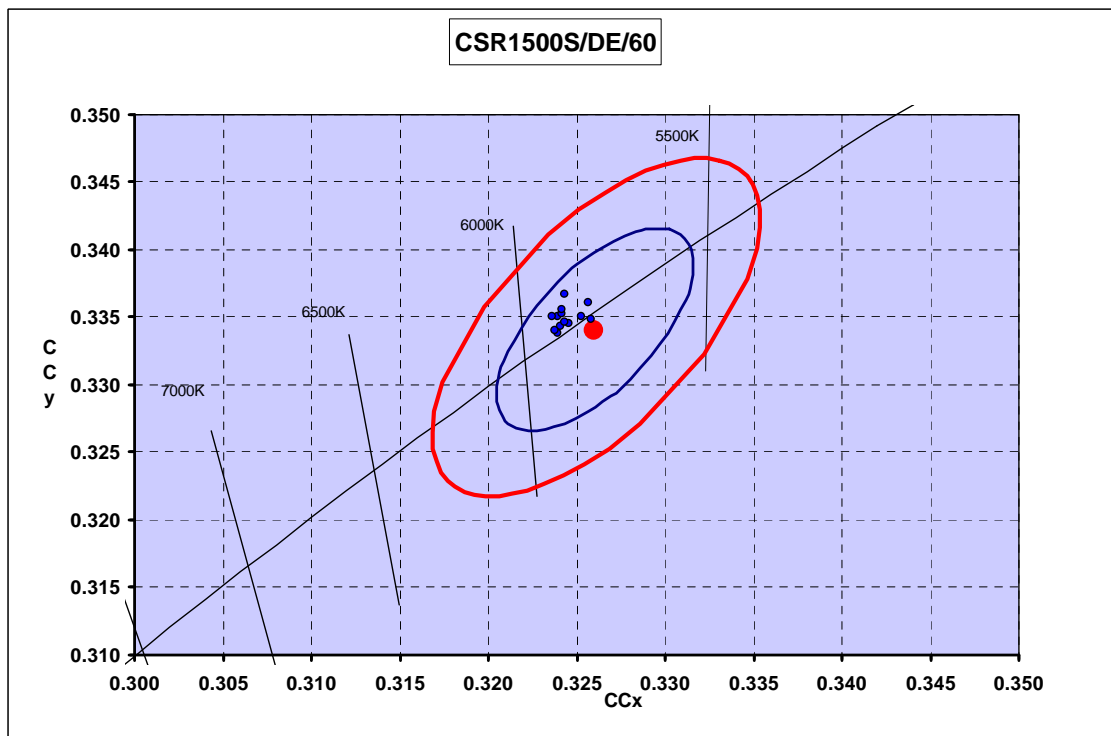

Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life of 500 hours
- Lamp should be replaced when significant optical degradation is noticed
- Do not exceed rated seal temperature of 450° C
- Use only with properly rated fixtures and ballasts
- Maximum permissible bulb temperature is 500° C



GE imagination at work

Distributor:


Techni-Lux
www.techni-lux.com

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com